


XB 500 APF - ADAPTER PLATE - FEET

for XB 500 and XB 500 T, load capacity 80 kg


Item no.: 20957

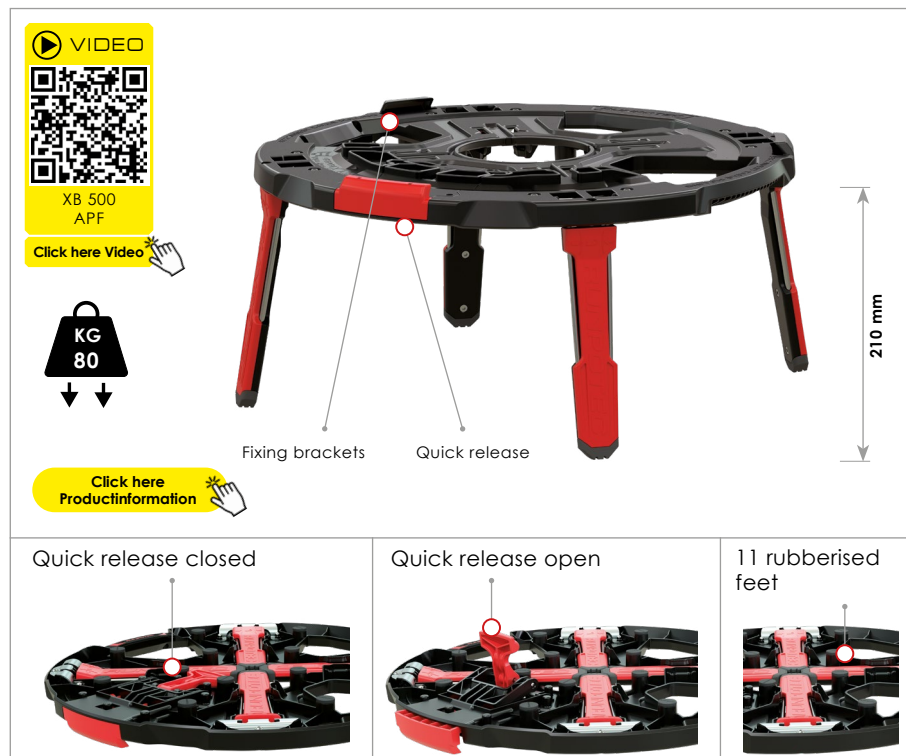

Adapter plate connected with XB 500 / XB 500 T



Application image

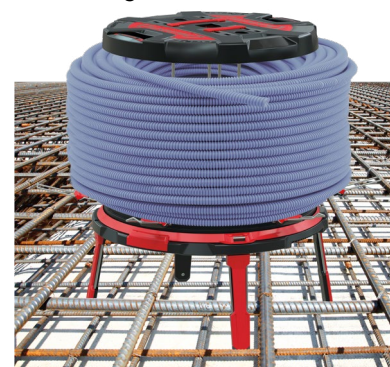


Quick release closed



Quick release open



11 rubberised feet



DATA

ART.NR.	20957
DIMENSION	Ø 560 mm x H 50 mm
LOAD CAPACITY feet unfolded	80 kg
LOAD CAPACITY feet folded in	300 kg
WEIGHT	2,57 kg
EAN-Code	9120045476378
MATERIAL	Special plastic, stainless steel joints

ADVANTAGES

- Optimal for unwinding and rolling of pipe, cable bundles or cable drums on steel-laminated concrete ceilings
- The XB 500 or XB 500 T can be quickly connected and disconnected using the fixing brackets and the quick-release lever
- In combination with XB 500 and XB 500 T, loadable up to 80 kg

DESCRIPTION

The XB 500 APF - Adapter plate - Feet can be connected to the XB 500 or XB 500 T professional cable roller. This enables optimal unwinding and rolling of pipe, cable bundles or cable drums on steel-laminated concrete ceilings during the construction phase. The adapter plate can be quickly connected to the XB 500 or XB 500 T and separated again using the fixing brackets and the quick-release lever on the underside. The four fold-out feet allow the XB 500 and XB 500 T to stand higher (21 cm) on the ceiling to be concreted, preventing it from slipping and ensuring trouble-free rolling. In this combination, the XB 500 and XB 500 T can hold up to 80 kg.

Optimum area of application: for optimum rolling and unrolling on steel-laminated concrete ceilings

Application film: You can watch a short, very informative application film by scanning the QR code or at www.runpotec.com.

Scope of supply: 1 x XB 500 APF - Adapter plate - Feet with 4 fold-out feet

INFORMATION

Use with:

XB 500 and XB 500 T

Item no.: 10136 | Item no.: 10187



Click here
Productinformation